


RoHS
Compliant

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

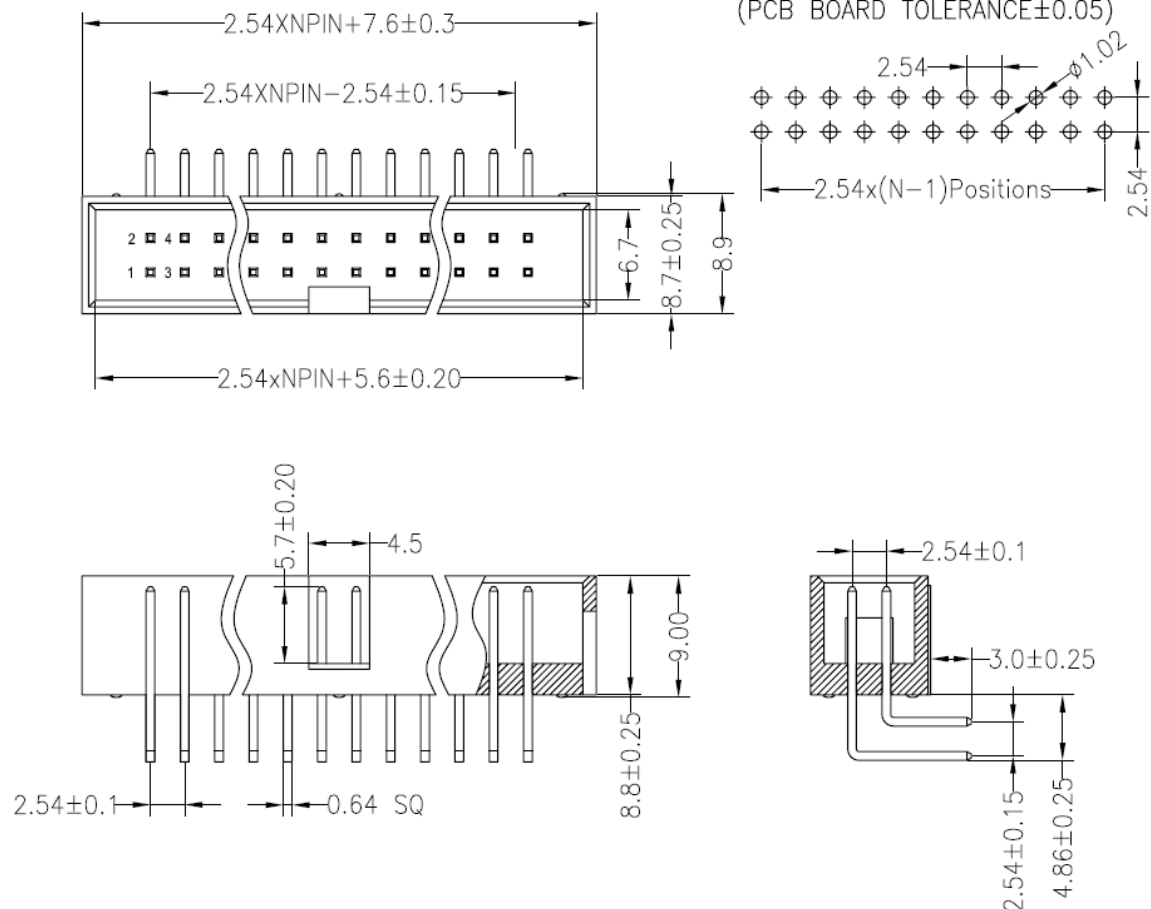

SPECIFICATIONS

Current Rating : 3AMP
 Operation Temperature: $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Contact Resistance : $20\text{m}\Omega$ Max.
 Insulation Resistance: $1000\text{M}\Omega$ Min.
 Withstanding Voltage : AC 1000V/Minute
 Insulator Material : PA6T(UL94V-0)
 Contact Material : Brass
 Contact plating : Au or Sn over Ni

Order Information

Series NO.	PIN NO.	PIN Type	Mounting	Plated	Cap	Post	Color	Height	Packing	Empty
B22D	XX	R	D	X	0	0	B	6	4	X
2.54P BOX Header Dual Rows	Pin Per Row	R: Right Angle V: Vertical	D: DIP S: SMT	0: Tin 1: G/F	0: w/o cap 1: w/ cap	0: w/o post 1: w/ post	B: Black	6: 8.9	4: Tray	1: 9/10Pin for 2x10P 2: 11/12Pin for 2x15P

REV.	REVISION RECORD	DATE	General Tolerance		
A	Original	12/05/16"	LINEAR	0.0 ± 0.25 0.00 ± 0.20	
B	Revised	11/27/19"			UNIT:mm
			A4	NAME	TITLE: 2.54mm Box Header DIP Right Angle Dual Rows 8.9H
			APPROVED	KENNY	DWG.NO: B22DXXRDX00B64X-210
			CHECKED	BRUCE	REV. B
			DESIGNER	BOLANYU	SCALE 1:1 SHEET 1 OF 1