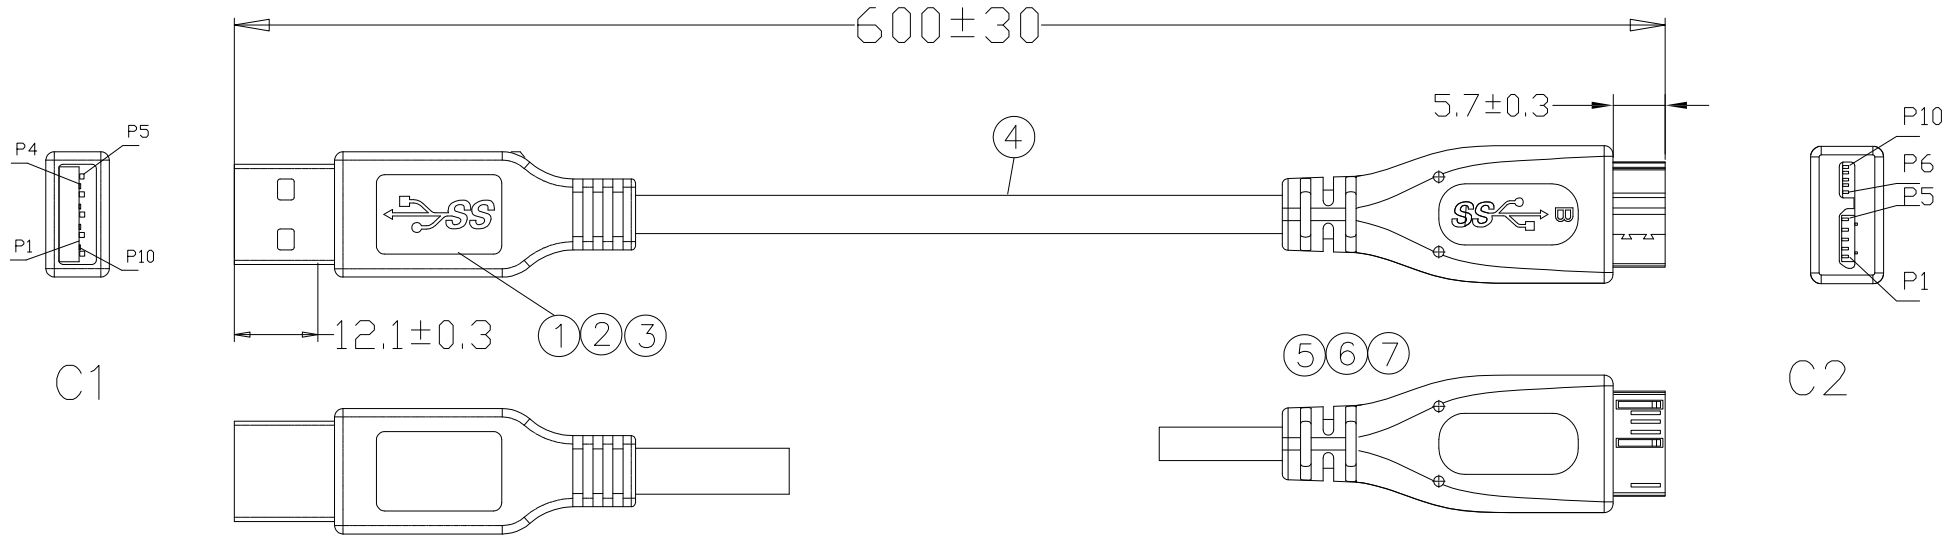


Notes
Cable: {[30AWG(7/0.103)*1P+DW(7/0.1)+AL/MY+MY]*2+30AWG(7/0.1)*1P
+24AWG(7/0.203)*2C+FILLER+AL/MY+BD(16/6/0.1)}Tin
Core: STP*2P_FO-SKIN ø0.7±0.05 color-yellow&blue, orange&purple
UTP*1P_FO-SKIN ø0.55±0.05 color-white&green
2C_SR-PVE ø1.1±0.05 color-red/black
Jacket: ø5.5±0.15 80°C PVC
Printed: 2725 E87647-DG 兄AWM 80°C30V 30AWG*3P 24AWG*2C USB3.0 Black


RoHS Compliant

Test requirements:
A.Contact Resistance: 3Ω max.
B.100% test short ,open, miswire.
C.Insulation Resistance: 20MΩ min. DC200V 10ms

Wire Assignment

C1	COLOR	C2	REMARK
1	RED	1	VBS
2	WHITE	2	D-
3	GREEN	3	D+
4	BLACK	5	GRN
5	ORANGE	6	SDP1-
6	PURPLE	7	SDP1+
7	DRAIN	8	GRN
8	YELLOW	9	SDP2-
9	BLUE	10	SDP2+
SHELL	BRAID	SHELL	

Packaging:



NO.	DESCRIPTION	Q'TY	MATERIAL
8.	MINI TIE	0.1M	100MM,BLACK
7.	METAL CAN(LOWER)	1PC	NI PLATED
6.	METAL CAN(UPPER)	1PC	NI PLATED
5.	Micro USB 3.0 B/M	1PC	BLACK 15u"
4.	USB 3.0 CABLE	1M	OD=5.5±0.15MM
3.	METAL CAN(LOWER)	1PC	NI PLATED
2.	METAL CAN(UPPER)	1PC	NI PLATED
1.	USB 3.0 A/M	1PC	BLUE 15u"

ORDER INFORMATION

CU3DMGM 4 B 9-238

- CU3DMGM: USB 3.0 AM TO Micro USB 3.0 BM Cable
- 4: Cable Length 4:600mmL
- B: Cable Color B: Black
- 9-238: Cable O.D. 9:5.5

REV.	REVISION RECORD	DATE
A	Original	10/13/17'

General Tolerances
LINEAR 0.0 ±0.35, 0.00±0.20 ANGLES ±3°
UNIT: mm

A4	NAME	DATE
APPROVED	MARTIN	
DESIGNER	MERLIN	
DRAWN	ANGEL	

ARIBA TECHNOLOGY CO., LTD.

TITLE: USB 3.0 A MALE TO Micro USB 3.0 B MALE CABLE ø5.5 600L

DWG.NO.: CU3DMGM4B9-238 REV. A

SCALE 1 : 1 SHEET 1 OF 1