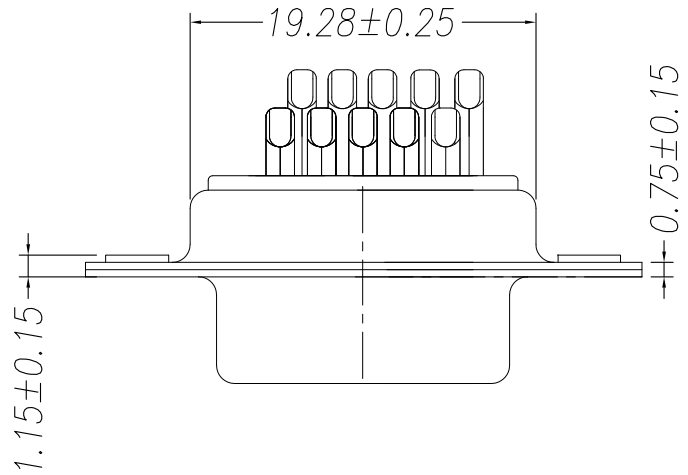

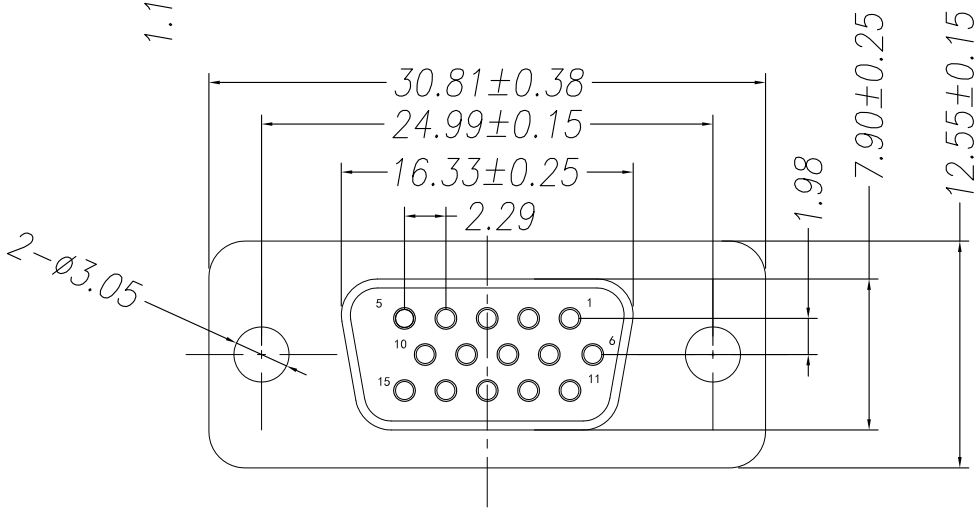

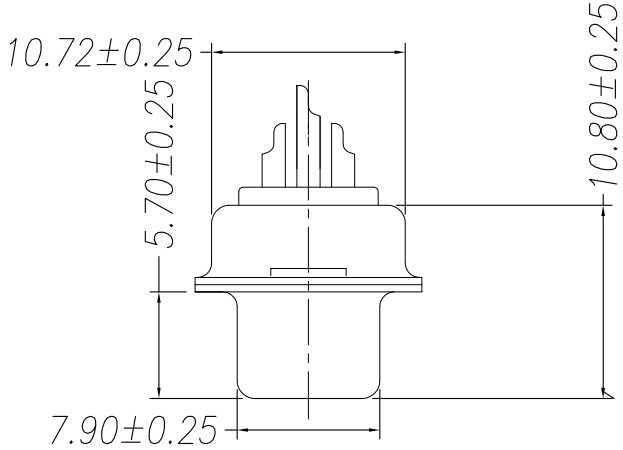

Note:
1.Material:
- 1.1 Insulator: PBT
- 1.2 Contact: C2680
- 1.3 Shell: SPCC

2.Specification:
- 2.1 Contact Resistance: 25mΩ Max.
- 2.2 Dielectric Withstanding Voltage: 500V(AC)
- 2.3 Insulation Resistance: 500 MΩ Min
- 2.4 Insert Force: 7.5 Kgf Max.
- 2.5 Withdraw Force: 0.52 Kgf Min.
- 2.6 Temperature Range: −30°C~+85°C
- 2.7 Durability: 500 Times at speed 200 times/hr

RoHS Compliant

Order Information :

DSSLH-F 15 X XX C -59

- DSSLH-F: Hi D-Sub Solder Female Traditional Type Series
- 15: Pin
- X: X:Without any screw and accessories
- XX: 03:Gold Flash/Tin 15:Au 15u"/Tin 30:Au 30u"/Tin
- C: C:Black B:Blue

REV.	REVISION RECORD	DATE
A	Original	08/05/15'

LINEAR 0.0 ±0.35 0.00±0.20	ANGLES ±3°	
UNIT: mm		
A4	NAME	DATE
APPROVED	COLIN	
DESIGNER	KEN	
DRAWN	AMY	

ARIBA TECHNOLOGY CO., LTD.

TITLE: Hi D-Sub 15P Solder Female Type

DWG.NO.: DSSLH-F15XXXC-59 REV. A

SCALE 1 : 1 SHEET 1 OF 1