


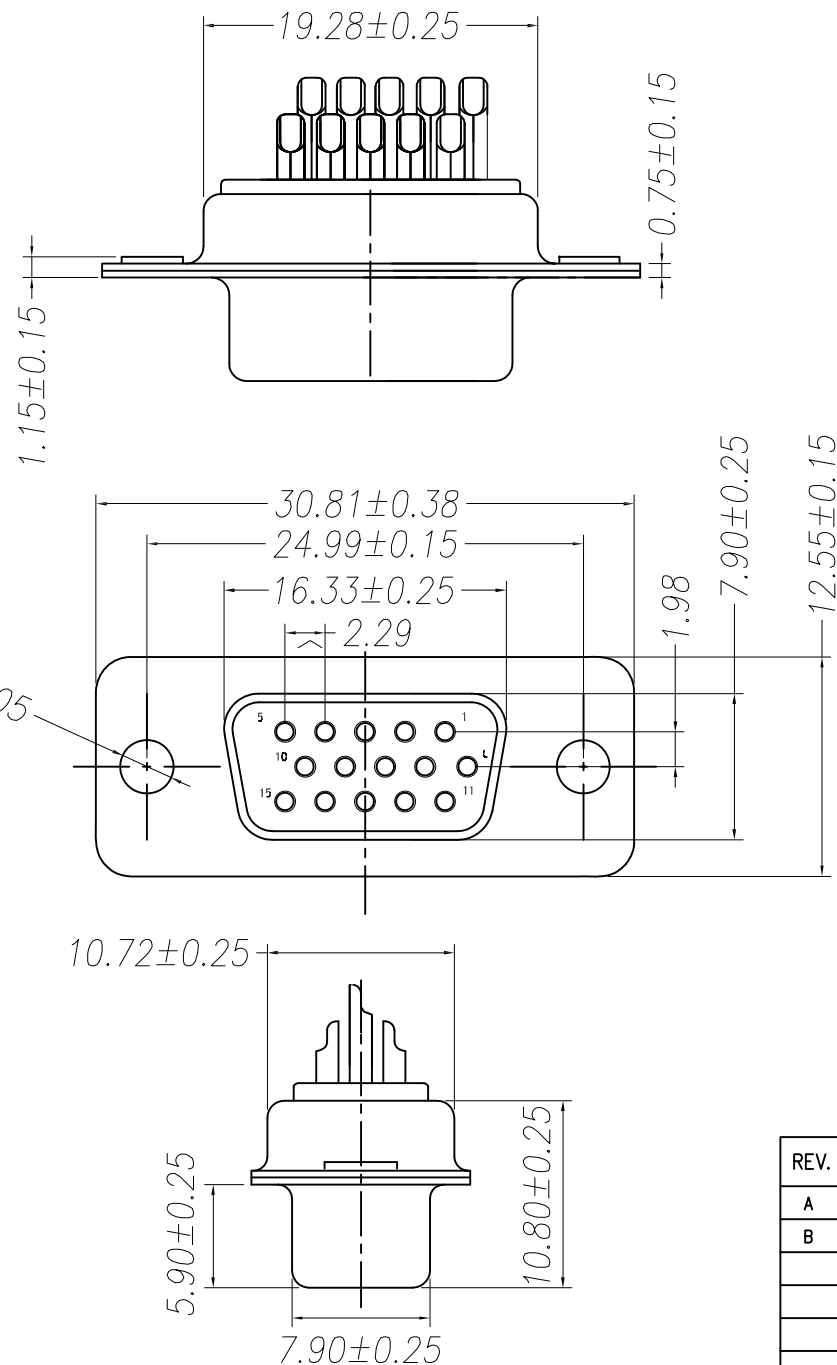

Note:

1.Material:

- 1.1 Insulator: PBT
- 1.2 Contact: C2680
- 1.3 Shell: SPCC

2.Specification:

- 2.1 Contact Resistance: 25mΩ Max.
- 2.2 Dielectric Withstanding Voltage: 500V(AC)
- 2.3 Insulation Resistance: 500 MΩ Min
- 2.4 Insert Force: 7.5 Kgf Max.
- 2.5 Withdraw Force: 0.52 Kgf Min.
- 2.6 Temperature Range: -30°C~+85°C
- 2.7 Durability: 600 Times at speed 300 times/hr

RoHS
Compliant

Order Information :

DSSLH-M

15

X

XX

X -59

Hi D-Sub Solder Male
Traditional Type Series

Pin

X:Without any screw
and accessories

01:Gold Flash
15:Au 15u"
30:Au 30u"

C:Black
B:Blue

REV.	REVISION RECORD	DATE	LINEAR 0.0 ±0.35 0.00±0.20			ANGLES ±3°		ARIBA TECHNOLOGY CO., LTD.			
A	Original	03/23/16'									
B	Revised	09/12/19'		UNIT: mm		TITLE: Hi D-Sub 15P Solder Male Type					
			A4	NAME	DATE						
			APPROVED	SUMMY		DWG.NO.: DSSLH-M15XXXX-59					
			DESIGNER	KEN							
			DRAWN	RUBY		SCALE	1 : 1	SHEET	1 OF 1		