

Order Information


Series NO.	PIN NO.	PIN Type	Mounting	Plated	Cap	Post	Color	Height	Packaging	
F12D	XX	V	D	X	0	0	B	3	3	-131
1.27P Femle Header Dual Rows	Per Row Pin	R: Right Angle V: Vertical	D: DIP S: SMT	0: Tin 1: G/F	0: w/o cap 1: w/ cap	0: w/o post 1: w/ post	B: Black	3: 3.4	3: Bag	

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

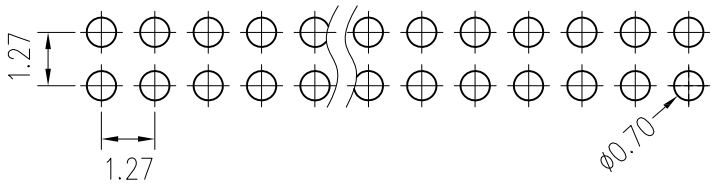

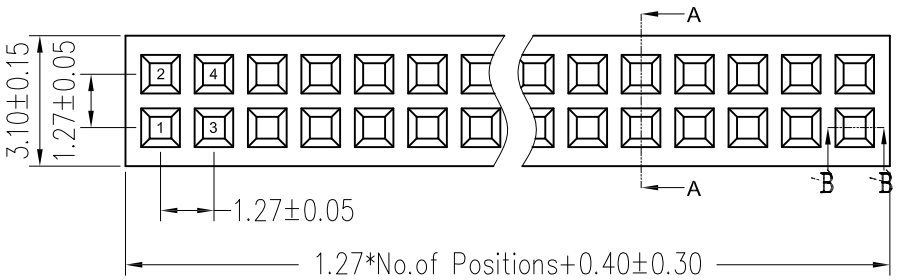

Section B–B

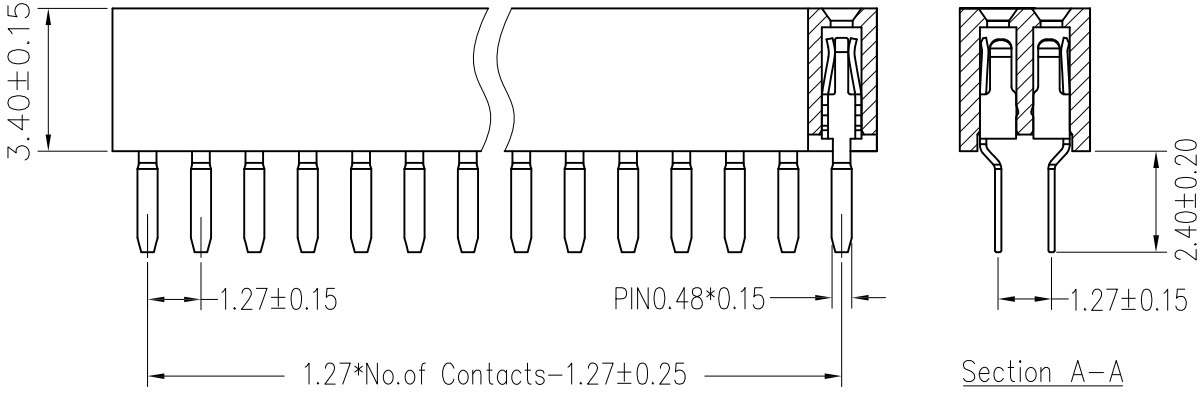

Section A–A

NOTES:
CURRENT RATING: 1.0A
CONTACT RESISTANCE: 20mΩ Max.
WITHSTAND VOLTAGE: 500V AC/DC
INSULATION RESISTANCE: 1000MΩ Min.
OPERATION TEMPERATURE:-25℃~+85℃

INSULATOR MATERIAL: PA9T+30% G.F. UL94V-0
CONTACT : Phosphor Bronze
CONTACT PLATING: TIN OR GOLD OVER NI

RoHS Compliant

REV.	REVISION RECORD	DATE
A	Original	06/13/18"

General Tolerance
LINEAR 0.0 ±0.35, 0.00 ±0.20 ANGLE ±3°

UNIT:mm

A4	NAME	DATE
APPORVED	SUNNY	
DESIGNER	TED	
DRAWN	WAYFO	

ARIBA TECHNOLOGY CO., LTD.

TITLE: 1.27mm Pitch Female Header DIP Vertical Dual Rows 3.4H

DWG.NO: F12DXXVDX00B33-131 REV. A

SCALE 1 : 1 SHEET 1 OF 1