

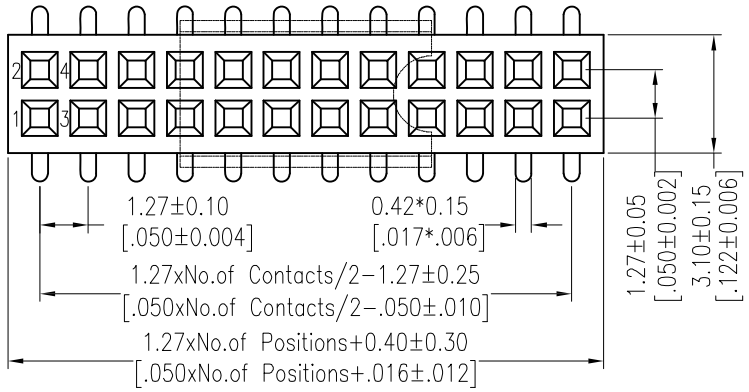






Special CAP for 2*2P,2*3P,2*4P

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

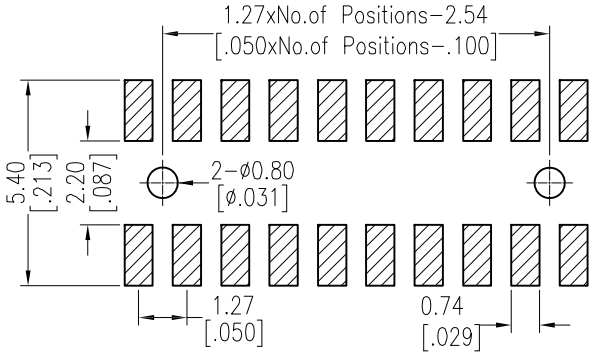


RoHS Compliant

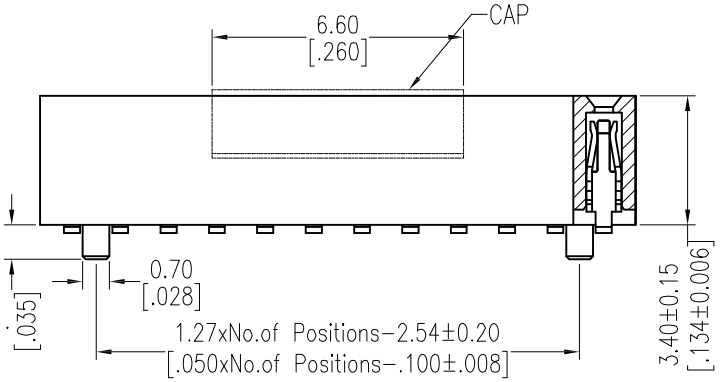

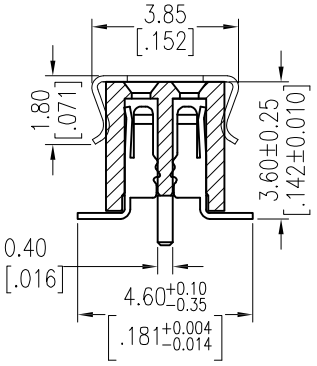

TYPE 2 WITH POST



TYPE 1 W/O POST

NOTES:
Current Rating: 1.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40℃ to +105℃

Contact Material: Phosphor Bronze
Contact plating: Au Or Sn Over Ni
Insulator Material: PA9T+30%GF UL94V−0 BK

Order Information:

Series NO.	PIN NO.	PIN Type	Mounting	Plated	Cap	Post	Color	Height	Packing	
F12D	XX	V	S	1	1	X	B	3	X	−131
1.27P Female Header Dual Rows	Pin Per Row	R: Right Angle V: Vertical	D: DIP S: SMT	0: Tin 1: G/F 2: Selective G/F 5: 10U"	0: w/o cap 1: w/ cap	0: w/o post 1: w/ post	B: Black	3: 3.4mm	1: Tube 2: Tape&Reel 3: Bag 4: Tray	

REV.	REVISION RECORD	DATE
A	Orignal	06/06/14'
B	Revisedl	05/06/15'

General Tolerances
LINEAR 0.0 ±0.35, 0.00±0.20 ANGLES ±3°
UNIT: mm

A4	NAME	DATE
APPROVED	MARTIN	
DESIGNER	MERLIN	
DRAWN	ANGEL	

ARIBA TECHNOLOGY CO., LTD.

TITLE: 1.27Pitch Female Header Vertical SMT Dual Rows

DWG.NO.: F12DXXVS11XB3X-131 REV. B

SCALE 1 : 1 SHEET 1 OF 1