


Order Information

Series NO.	PIN NO.	PIN Type	Mounting	Plated	Cap	Post	Color	Height	Packing	
F12S	XX	V	D	1	0	0	B	3	X	-210
1.27P Female Header Singlel Rows	Pin Per Row	R: Right Angle V: Vertical	D: DIP S: SMT	0: Tin 1: G/F 2: Selective G/F 5: 10U"	0: w/o cap 1: w/ cap	0: w/o post 1: w/ post	B: Black	3: 3.4	1: Tube 2: Tape&Reel 3: Bag 4: Tray	



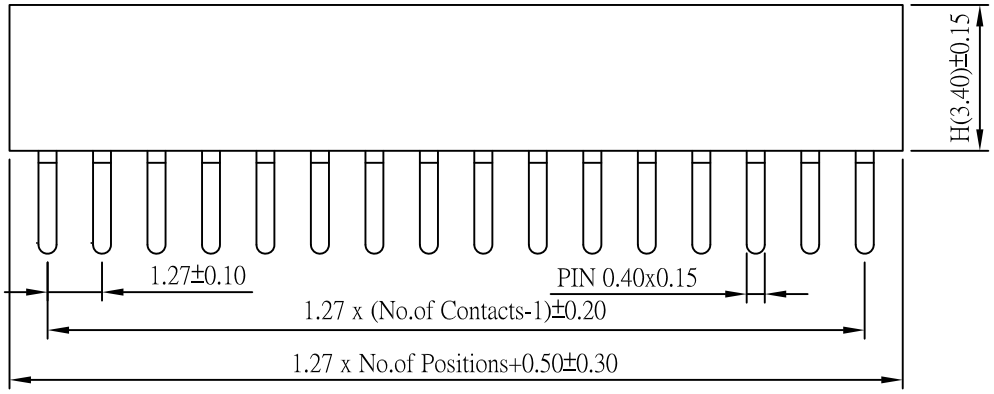



RoHS Compliant

SPECIFICATIONS

Current Rate: 1 AMP
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40℃ to +105℃

MATERIAL

Insulator: UL 94V-0 Nylon 6T
Terminal: Copper Alloy
Plating: Gold Plated



Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

REV.	REVISION RECORD	DATE
A	Original	06/21/17"

General Tolerance
LINEAR 0.0 ±0.35, 0.00 ±0.20 ANGLE ±3°

UNIT:mm

A4	NAME	DATE
APPORVED	SUNNY	
DESIGNER	TED	
DRAWN	WING	

ARIBA TECHNOLOGY CO., LTD.

TITLE: 1.27mm Pitch Female Header Vertical Single Row DIP Type Insulator 3.4H

DWG.NO: F12SXXVD100B3X-210 REV. A

SCALE 1 : 1 SHEET 1 OF 1