

Ordering Information


WE - 2 - XX - PT -E023-1-44


- WE: 1.25Ph Wafer
- 2: Solder/PCB 2:DIP VT
- XX: Total PIN
- PT: Contact Plated PT: Tin
- E023-1-44: Packing 1: Bag

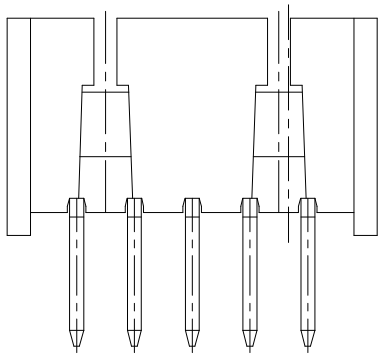

4~16P

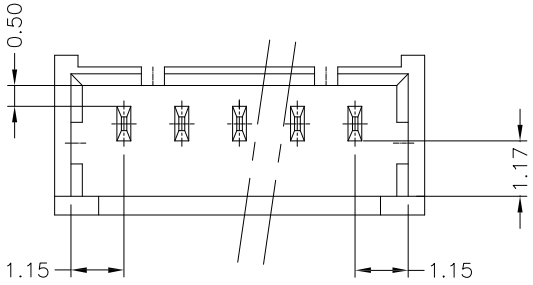

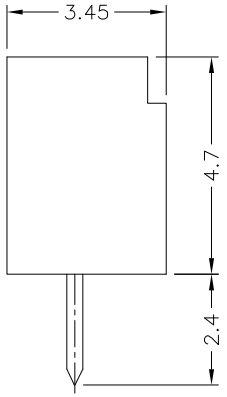

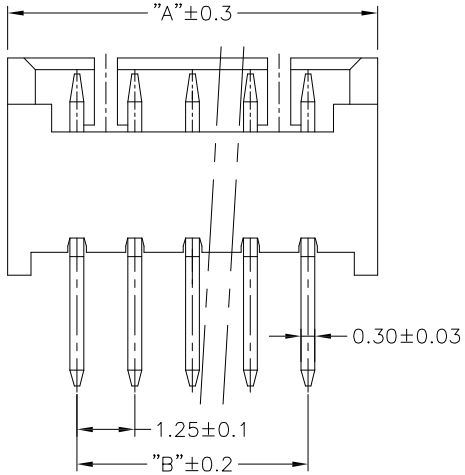


RoHS Compliant

SPECIFICATIONS:

Applicable Wire:AWG#28~#32
Voltage Rating:100V AC/DC(rms)
Current Ration:1.0A AC/DC(AWG#28)
Withstand voltage:250V AC/Min(rms)
Operating Temperature:-25℃~+85℃
Insulation Resistance:100MΩ min.
Contact Resistance:30mΩ max.


MATERIAL:

Terminal:Phosphor Bronze
Housing:PA46,UL94V-0,Natural

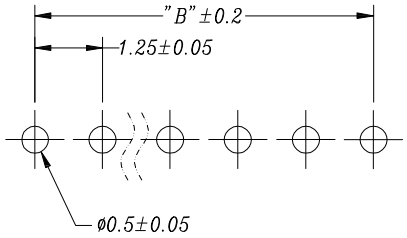

RECOMMENDED PCB LAYOUT

No. of Contacts	DIMENSIONS	
	DIM A	DIM B
2	4.25	1.25
3	5.50	2.50
4	6.75	3.75
5	8.00	5.00
6	9.25	6.25
7	10.50	7.50
8	11.75	8.75
9	13.00	10.00
10	14.25	11.25
11	15.50	12.50
12	16.75	13.75
13	18.00	15.00
14	19.25	16.25
15	20.50	17.50
16	21.75	18.75

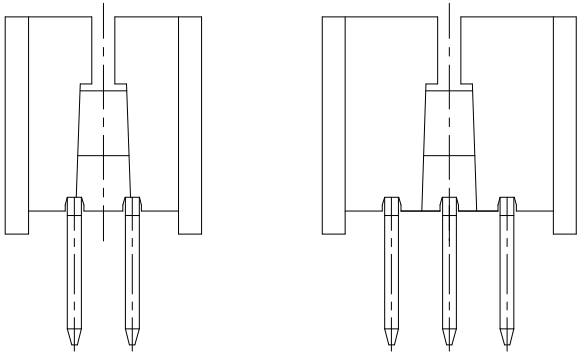

2P

3P

REV.	REVISION RECORD	DATE
A	Original	04/26/09"
B	Revised	06/07/13"
C	Revised	10/02/15"
D	Revised	05/26/16"

General Tolerance	
LINEAR 0.0 ±0.25, 0.00 ±0.20	ANGLE ±3°
UNIT:mm	
A4	NAME
APPROVED	KENNY
DESIGNER	BRUCE
DRAWN	JINDAR

ARIBA TECHNOLOGY CO., LTD.

TITLE: 1.25Ph Wafer DIP Vertical 4.7H

DWG.NO: WE2XXPTE0231-44 REV. D

SCALE 1 : 1 SHEET 1 OF 1